


TOYOTA

How to apply Toyota ProTect


Exterior surfaces

- Wash the vehicle and dry with a clean chamois leather or cloth.
- Ensure that residue and contaminants including insects, bird droppings, sap and tar are removed.
- Make sure all painted surfaces, alloy wheels and side windows to be treated are clean and dry. Use airline if necessary.

1. Pre-cleaning

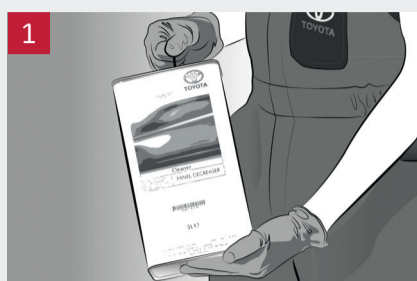

Use a quality panel de-greaser as an exterior pre-clean.

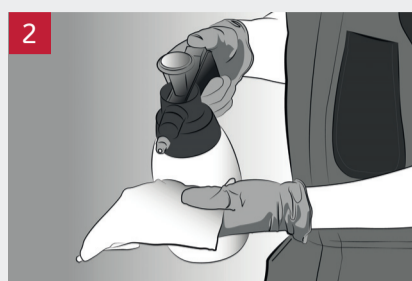

Spray the exterior Pre-clean onto a clean cloth.



Apply Pre-clean to vehicle exterior and allow to dry.

2. Exterior surfaces



Shake the Toyota ProTect well.




Pour the Toyota ProTect bottle 'A' onto the white cloth from the kit.



Wipe Toyota ProTect onto panels in straight lines.



Apply Toyota ProTect to side windows in the same way.

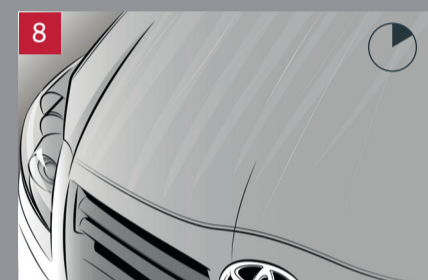


Allow 5-10 minutes to ProTect coating to dry while treating wheels.

3. Alloy wheels

While the Protect coating on the vehicle exterior dries, use the intervening time to apply ProTect to the alloy wheels.

IMPORTANT: Toyota Protect MUST NOT be applied to windscreens.

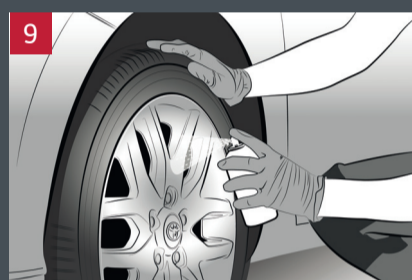

Wearing suitable safety equipment, apply the aerosol Alloy Wheel Protector to alloy wheels.



Use a dry cloth to buff carefully for a smooth, protected finish.

4. Exterior surfaces continuation



Dampen the yellow cloth, shake the Hardener bottle 'B' and add to the cloth.



Apply Hardener to all previously treated bodywork and side windows.



Buff carefully for a smooth, protected finish using the dry grey cloth from the kit.

Interior Fabrics

- Ensure seats, carpets and floor mats are clean and dry
- If there are stains or marks in used vehicles, these must be professionally cleaned and allowed to dry fully
- Seats, carpets, and floor mats in used vehicles must be vacuumed.

5. Interior Fabrics




Shake the Toyota ProTect fabric protector well.



Spray evenly at a distance of 20-25 cm. Double application on driver's seat.



Rub into fabric with a gloved hand.

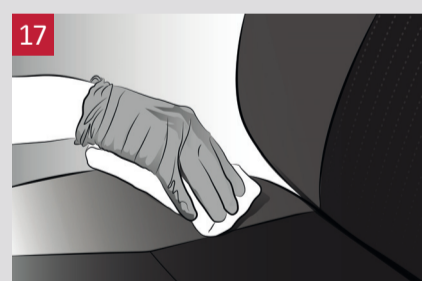

Wipe over-spray off non-fabric areas.

Important

- Do not spray Toyota fabric Protector on plastic surfaces, dashboards, plastic seat trims, seat belts, centre consoles and panels, windscreens, side and rear windows or leather seats. Remove over-spray with a cloth immediately.
- Keep a clean, dry cloth to hand to wipe off any over-spray on the plastic surfaces. This is important, as if left, the product will dry and leave a lacquered finish that can be difficult to remove.

Application and drying times

- Application time is approximately 20 minutes.
- Natural drying time for Toyota ProTect fabric protector is approximately 40 minutes to 1 hour.
- Drying times can be reduced by using the vehicle heating system.
- If seating areas are not completely dry when customer collects the vehicle, we recommend that disposable plastic covers are placed on seats. The customer will need to remove the covers later to allow the seating areas to dry fully.